

Description

The Header Breakout board is designed to assist developers with their prototypes by exposing the high-density connectors/pins of 1.27mm pitch with 2.00mm and 2.54mm Pitch connectors/pins vice versa.



Features

- 40 Pin Dual Row pads exposed in three different pitch lengths.
- Breakout pads with pitch
 - 1.27 mm pitch (2 numbers)
 - 2.00 mm pitch (2 numbers)
 - 2.54 mm pitch (2 numbers)
- PCB designed to have tracks connecting in both layers so that maximum current can be carried in them

Target Area

- Prototyping & testing
- Test Jigs and Fixtures
- Quick POCs.

Mechanical Information

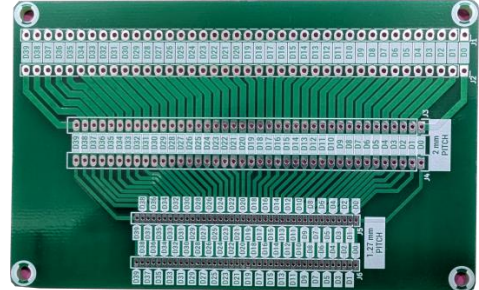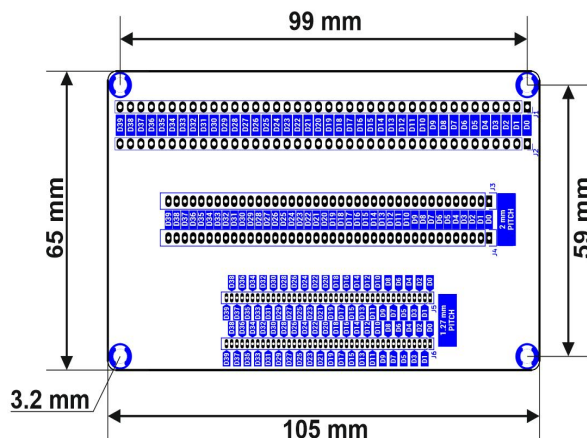

Header Breakout Board

Usage Example

